




Metal Lathe | PL-1236E

Product Images

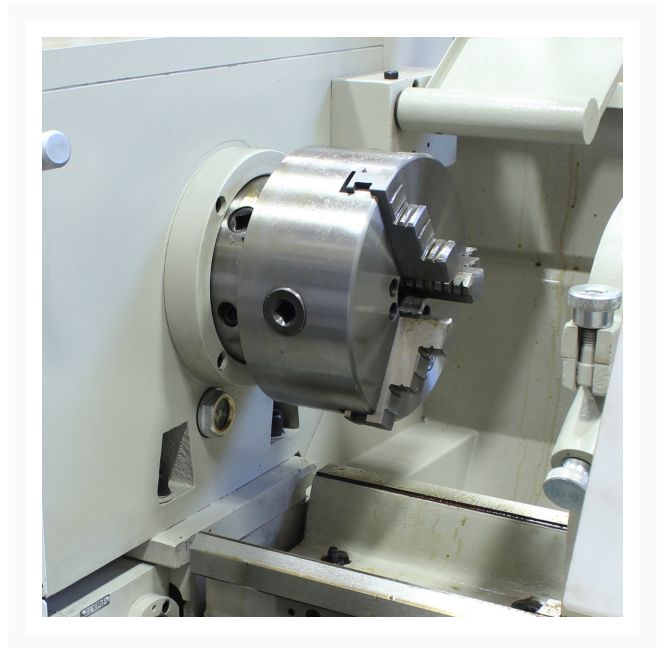

Short Description

Additional Information

Stock Number	BA9-1016616
Distance Between Centers (In.)	36"
Input Power	220V / 1-phase
Leadscrew Thread Pitch	8 T.P.I.
Length of Gap (In.)	6"
Model Number	PL-1236E-1.0
Nose Radius (In.)	D1-4"
Prop 65	Cancer and Reproductive Harm
Quick Change Collet Size (Mm.)	.625" x .625"
Range of Cross Feeds (IPR)	0.007" – 0.0187"/rev
Range of Inch Threads (TPI)	4 - 56 T.P.I.
Range of Longitudinal Feeds (IPR)	0.002" – 0.0548"/rev
Range of Metric Threads	0.4 – 7 mm
Shipping Dimensions (L x W x H) (In.)	69x44x64
Spindle Bore (In.)	1.50"
Spindle Diameter (In.)	1.250"
Spindle Taper	Morse #3
Spindle Travel (In.)	4"
Warranty	1 Year
Weight (Lbs.)	1395
Gross Weight	1395.0

